

# PowerBoss® CSS/82

## An Economical Scrubber with Pre-Sweeping Capability

Rugged high-density polyethylene tanks won't rust and leak – five year warranty



Premium quality components throughout mean less service and replacement

A compact size for excellent maneuverability when working in congested or high-traffic areas

Direct-throw sweeping method provides clean, reliable debris pick-up

Automatic lift-in-reverse squeegee assembly is doubly-protected within frame and guard of unit

- Pre-sweeps and aggressively scrubs a 42-inch wide path
- Five cubic foot manual-dump aluminum hopper
- Large easy-to-fill and drain solution/recovery tanks
- Optional side sweep or scrub brush adds even more cleaning coverage



Quick-change disc scrub brushes help remove years of caked, oily dirt build-up. Scrub head floats for constant floor contact.


**Minuteman®**  
**PowerBoss®**

**Minuteman®**  
**PowerBoss®**  
Factory Direct Branch  
(734) 946-2903  
[www.powerbossequipment.com](http://www.powerbossequipment.com)



# PowerBoss® CSS/82


## POWER FEATURES

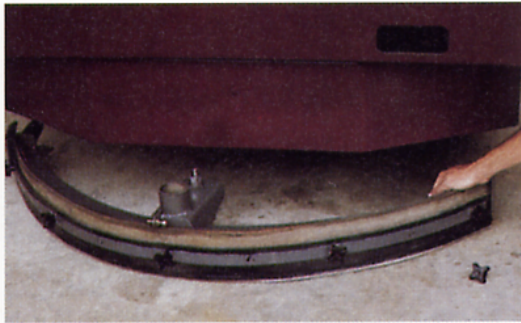

Quick-change squeegee can be removed in minutes. The four edges offer increased productivity and performance.



Sweeping broom can be easily removed in minutes and turned end-for-end to increase its life. Efficient and effective direct-throw sweeping.

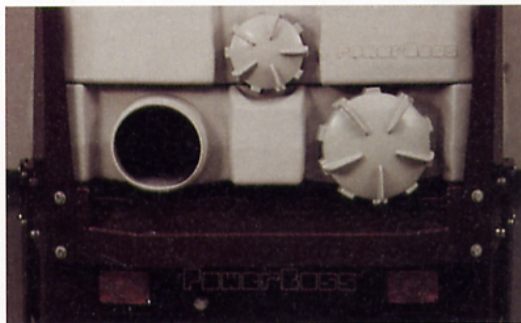

Oversized cleanout ports with simple screw-on caps facilitate recovery tank draining and sludge removal.

- Transverse, mid-engine design for stability and ease of accessibility
- Heavy-duty, 4-cylinder, liquid-cooled engine provides efficient power
- Head, tail, instrument lights standard
- State-of-the-art air-moving system leaves floor nearly dry when scrubbing
- Industrial smooth-ride tires for traction and reliability
- Many options available to meet your needs

## Minuteman®

### PowerBoss®

World Headquarters  
Minuteman International, Inc.  
111 South Rohlwing Road  
Addison, IL 60101-4244  
Telephone: (630) 627-6900  
Fax: (630) 627-1130  
www.minutemanintl.com

Minuteman/PowerBoss, Inc.  
175 Anderson Street  
Aberdeen, NC 28315  
Telephone: (910) 944-2105  
Fax: (910) 944-7409  
www.powerboss.com

## GENERAL SPECIFICATIONS

Subject to change without notice.  
(Metric shown in parenthesis.)

**POWER** - Transverse, mid-engine design. 53 HP (39.6 kw), 4-cylinder, liquid-cooled gasoline engine. Electric start, 12-volt battery. Eight-gallon (30.3 liters) gas tank. Optional: L.P. gas or 37.5 HP (27.9 kw), 4-cylinder, liquid-cooled diesel engine. 4-core radiator standard on all models.

**FRAME** - Unitized construction featuring 3/16-inch (4.8 mm) steel plate; reinforced at stress points.

**DRIVES** - Hydraulically-driven rear wheel. Variable speeds to 8 mph (12.87 kmh). Main and side brooms, scrub brushes and vacuum impeller are hydraulically operated.

**STEERING** - Standard power steering through rear tire.

**SWEEP PATH** - 42-inch (1067 mm) sweep path or 54-inch (1372 mm) with optional side brush.

**SWEEPING COVERAGE** - 67,000 sq. ft. (6,224 m<sup>2</sup>) per hour based on 42-inch (1067 mm) path at 4 mph (6.4 kmh) with 4-inch (102 mm) overlap or 77,500 sq. ft. (7,200 m<sup>2</sup>) per hour with optional side brush.

**SWEEPING BRUSHES** - Main Broom: 42-inch (1067 mm) cylindrical, one-piece plastic core disposable runs at constant RPM. Five minute broom change. Raised and lowered from operator compartment. Floats for uneven surfaces. Adjustment for pressure, wear. Side Brush: (Optional) 24-inch rotary, one-piece disposable. Bumper protected. Adjustment for angle, pressure and wear.

**DEBRIS HOPPER** - 5 cu. ft. (0.14m<sup>3</sup>); aluminum construction. Manual lift-out dumping.

**SCRUB PATH** - 42-inch (1067 mm) scrub path or 50-inch (1270 mm) path with optional side scrub brush.

**SCRUBBING BRUSHES** - Three rotary 14-inch (356 mm) OD quick-change brushes are hydraulically driven. Side scrub brush optional.

**SCRUBBING COVERAGE** - 67,000 sq. ft. (6,225 m<sup>2</sup>) per hour based on 42-inch (1067 mm) path at 4 mph (6.4 kmh) with 4-inch (102 mm) overlap or 77,500 sq. ft. (7,200 m<sup>2</sup>) per hour with optional side brush.

**SOLUTION TANK** - 68-gallon (257 liters) capacity with automatic water shutoff. Non-rusting high-density polyethylene-five year warranty. Optional stainless steel.

**RECOVERY TANK** - 65-gallon (246 liters) capacity. Non-rusting high-density polyethylene-five year warranty. Flexible drain hose and oversized cleanout ports provide easy emptying and cleaning. Optional stainless steel.

**VACUUM PICK-UP** - High-speed 9-inch (229 mm) impeller provides water pick-up through rear squeegee.

**SQUEEGEES** - Rear: One 44-inch (1118 mm) parabolic squeegee. Quick-change rubber. Side: Two floating side squeegees on either side of scrub head.

**SQUEEGEE ASSEMBLY** - Rear and side squeegees remove from machine in minutes. No tools required.

**CONTROLS** - Operator controls all functions of sweeping and scrubbing while seated. Instant forward, reverse and braking using one pedal. Foot pedal activated emergency/parking brake.

**INSTRUMENTS** - Ammeter, hour meter, electric fuel gauge, oil pressure, water temperature.

**TIRES** - Front: Two 16-inch (406 mm) OD industrial solid. Rear: One 16-inch (406 mm) OD industrial solid. Tire options available.

**WEIGHT** - Net: 2700-lbs. (1224 kg).  
Shipping: 3100-lbs. (1406 kg).  
All approximate.

**DIMENSIONS** - Length: 91-inches (2311 mm).  
Width: 48-inches (1219 mm)  
Height: 57-inches (1448 mm)  
With overhead guard: 87-inches (2210 mm).  
With cab: 83.50-inches (2121 mm).

**OPTIONS** - Ask your local Distributor for a wide range of options.

*Minuteman is a full line manufacturer of maintenance products including critical filter vacuums, industrial and commercial vacuums, sweepers, scrubbers, floor and carpet machines, PowerBoss® sweepers and scrubbers, Parker Sweeper® Litter Vacs and Multi-Clean® Chemicals for industrial, commercial and institutional facilities.*

SOLD & SERVICED BY:

**MINUTEMAN POWERBOSS**

25920 Northline Commerce Dr.  
Suite 400

Taylor, MI 48180  
(734) 946-2903

powerbossequipment.com



CSS820300